



PRELIMINARY REPORT

TO	GUAYACAN TERMINAL
FROM	ALS INSPECTION CHILE SPA
PRELIMINARY ISSUE DATE	APRIL 17, 2026
CLIENT REF	N/A
ALS REF	VAP-2604-1462
SCOPE OF SURVEY	INSPECTION OF 18 MOORING LINES.
VESSEL NAME	NISEKO QUEEN
PLACE OF SURVEY	COQUIMBO BAY
DATE OF SURVEY	APRIL 16 & 17, 2026
TIME OF SURVEY	FROM 20:30 HRS TO 01:00 HRS
Please find our preliminary report; this should be taken as an initial approach of the appointed inspection. Additional information, findings, photographs, and conclusions will be part of our final report.	

SURVEYOR'S COMMENTS
From a total of 18 mooring lines inspected: - All of them COMPLY with the length and visual condition for use.

1. SCOPE OF SURVEY

To perform a visual inspection to the condition of 18 mooring lines, measure its length and diameter, on board of M/V NISEKO QUEEN at the COQUIMBO BAY.



2. TIMES:

ITEM	DATE	TIME
ALS Surveyor arrives to inspection place	16.04.2026	20:30
Start Inspection of the 18 mooring lines on board the vessel		21:00
Inspection completed		23:30
ALS surveyor left the vessel	17.04.2026	01:00

3. INSPECTION

Below is a detail and observations of the mooring lines inspected:

ITEM	POSITION	MEASUREMENTS		SEAL ALS	OBSERVATIONS
		LENGTH (m)	DIAMETER (mm)		
1	Bow	235.8	35	0000848	ACCEPTED
2	Bow	239.9	40	0000849	ACCEPTED
3	Bow	236.6	40	0000850	ACCEPTED
4	Bow	234.7	38	0000851	ACCEPTED
5	Bow	231.4	40	0000852	ACCEPTED
6	Bow	232.9	38	0000853	ACCEPTED
7	Bow	233.6	40	0000854	ACCEPTED
8	Bow	237.1	40	0000855	ACCEPTED
9	Bow	236.3	36	2985071	ACCEPTED
10	Stern	234.9	41	2985072	ACCEPTED
11	Stern	233.5	36	2985073	ACCEPTED
12	Stern	232.3	38	2985074	ACCEPTED
13	Stern	231.6	40	2985075	ACCEPTED
14	Stern	230.4	37	2985076	ACCEPTED
15	Stern	235.1	42	2985077	ACCEPTED
16	Stern	230.2	40	2985078	ACCEPTED
17	Stern	233.8	41	2985079	ACCEPTED
18	Stern	236.8	38	2985080	ACCEPTED



4. COMMENTS

No records or history of previous inspections of the mooring lines were shown, not did the units possess visible or recognizable identification such as plates, sleeves, seals, or permanent marks.

The mooring ropes corresponding to mooring tails. According to information received from Vessel Chief officer the vessel does not use standard ropes.

Visual inspection of mooring ropes was carried out with artificial light.

5. CONCLUSIONS

From a total of 18 mooring lines inspected, all of them of them comply with the conditions for use.

Full details on mooring ropes inspection carried out will be sent in our final report, this report it is for vessels control and reference.

This survey was carried out without prejudice and in the interest of whom it may concern.


ALS INSPECTION CHILE Spa

Prepared by: V. Alfaro A.

Revised by: C. Alvear C.



PHOTOGRAPHIC SET

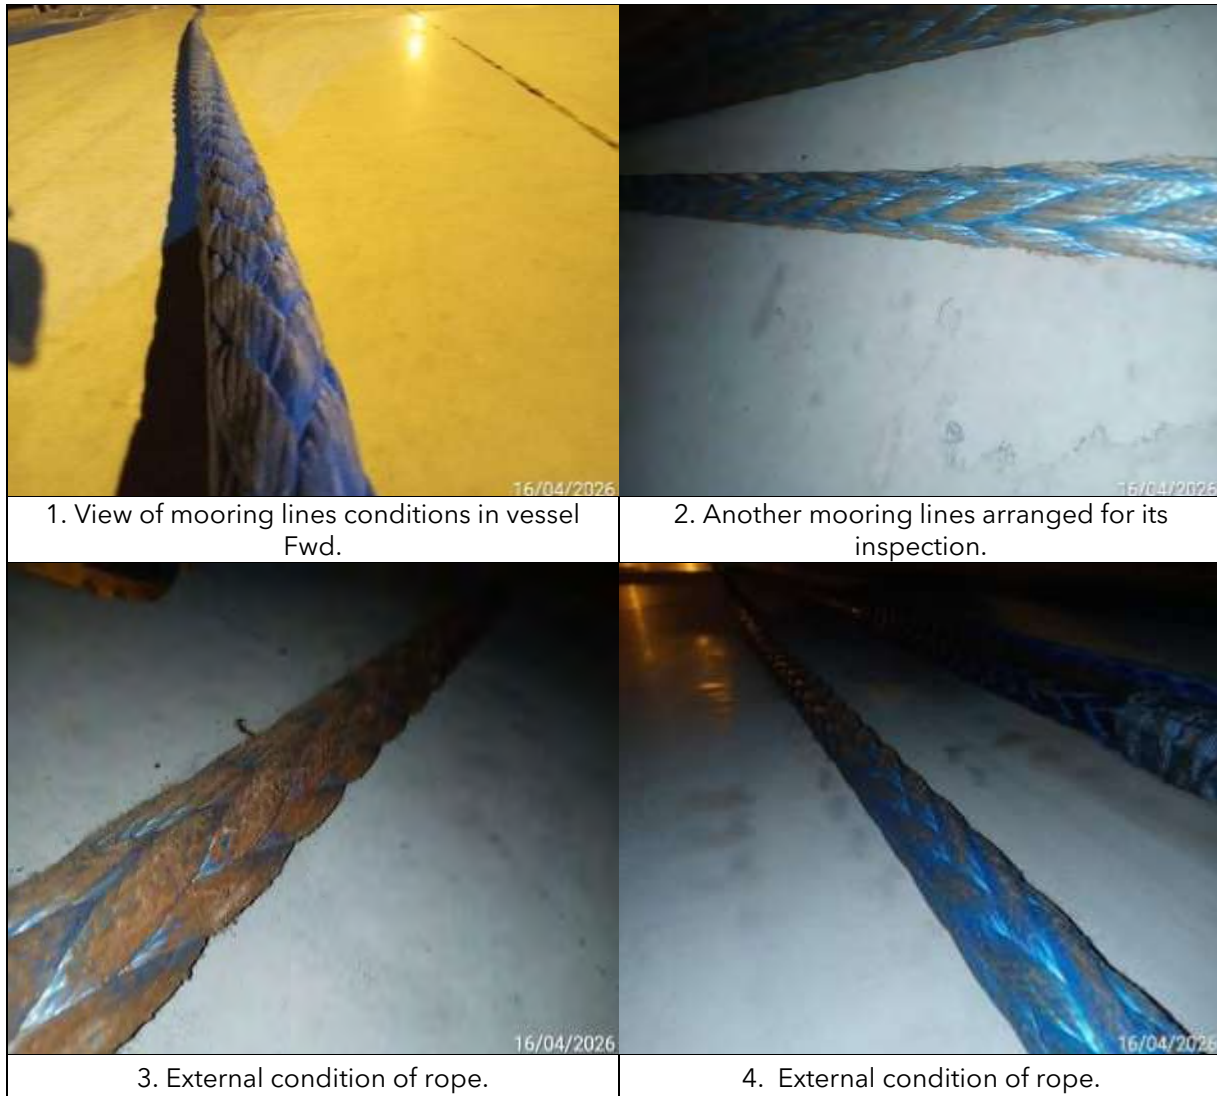



5. View of diameter measurement of the mooring lines.



6. View of the mooring lines measurement.



7. View of mooring line approved with ALS SEAL Nr. 0000848.



8. View of mooring line approved with ALS SEAL Nr. 2985071.